




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04N 7/087	A1	(11) International Publication Number: WO 97/01930 (43) International Publication Date: 16 January 1997 (16.01.97)
(21) International Application Number: PCT/US96/10840 (22) International Filing Date: 27 June 1996 (27.06.96) (30) Priority Data: 08/495,369 28 June 1995 (28.06.95) US (71) Applicant: GENERAL INSTRUMENT CORPORATION OF DELAWARE [US/US]; 13th floor, 8770 West Brynmawr Avenue, Chicago, IL 60631 (US). (72) Inventors: NUBER, Ray; 1311 Olivet Street, La Jolla, CA 92037 (US). MORONEY, Paul; 3411 Western Springs Road, Olivenhain, CA 92024 (US). HOOGENBOOM, Chris; Apartment 190, 26347 West Thousand Oaks Boulevard, Calabasas, CA 91302 (US). (74) Agent: LIPSITZ, Barry, R.; 755 Main Street, Monroe, CT 06468 (US).		(81) Designated States: AU, CN, NO, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: BANDWIDTH EFFICIENT COMMUNICATION OF USER DATA IN DIGITAL TELEVISION DATA STREAM

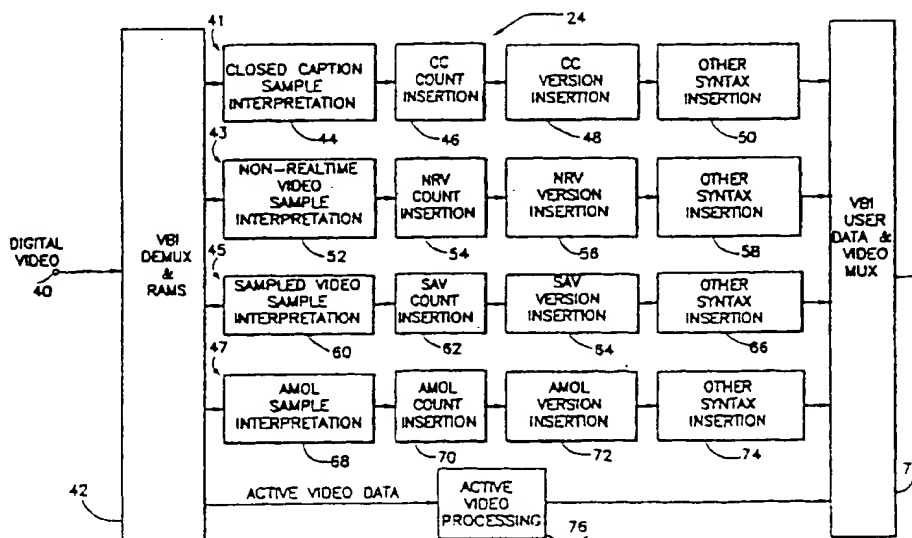

(57) Abstract

A method and apparatus are provided for communicating VBI user information for digital television. A syntax is provided which allows the transport of closed captions (41), non-realtime video (43), sampled video (45) and AMOL (47). Non-realtime video can be used to transport various types of data, such as a vertical interval test signal (VITS) through the system at full resolution. The provision in the syntax of a count for each type of VBI user information enables the adjustment of a digital television data stream to accommodate variable amounts and types of such information without space being reserved in advance. The provision of a priority number in the syntax enables decoders to discard VBI user information priorities which are not supported by the particular decoder.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

BANDWIDTH EFFICIENT COMMUNICATION OF USER DATA
IN DIGITAL TELEVISION DATA STREAM

BACKGROUND OF THE INVENTION

5 The present invention relates to the
communication of digital television signals, and
more particularly to a bandwidth efficient scheme
for providing user data in a digital television data
stream without the need to reserve space for the
user data in advance. Examples of such user data
10 include closed caption data, non-realtime video data
(e.g., vertical interval test signal - VITS),
sampled video data and automated measurement of
lineup (AMOL) data.

15 Digital transmission of television signals can
deliver video and audio services of much higher
quality than analog techniques. Digital
transmission schemes are particularly advantageous
for signals that are broadcast via a cable
television network or by satellite to cable
20 television affiliates and/or directly to home
satellite television receivers. It is expected that
digital television transmitter and receiver systems
will replace existing analog systems just as digital
compact discs have replaced analog phonograph
25 records in the audio industry.

One way to transmit the compressed video data
to a receiver is in the form of packets contained
within a packetized data stream. Typically, packets
carrying compressed video data are multiplexed with

other packets, e.g., carrying corresponding audio data and control information necessary to reconstruct a television signal. One standard for transporting digital television signals in this manner is the MPEG-2 standard, details of which can be found in the International Organisation for Standardisation, ISO/IEC 13818-1, International Standard, 13 November 1994 entitled "Generic Coding of Moving Pictures and Associated Audio: Systems," recommendation H.222.0, incorporated herein by reference. Further details of the video syntax and semantics for MPEG-2 video can be found in International Organisation for Standardisation, ISO/IEC 13818-2, International Standard, 1995 entitled "Generic Coding of Moving Pictures and Associated Audio: Video," recommendation H.262, also incorporated herein by reference.

In the MPEG-2 system (and the similar DigiCipher® II system proprietary to General Instrument Corporation, the assignee hereof) a transport stream, or transport multiplex is made up of a contiguous set of fixed length packets. The video sequence is transported using a hierarchical structure in which a sequence header is followed by various extensions, user data, a group of pictures ("GOP") header, optional user data, a picture header, etc. The sequence header provides information for a sequence of pictures, which in general will include more than one GOP. This

information includes, for example, horizontal and vertical size values, aspect ratio, frame and bit rate, and quantization parameters for the video data. A user data extension can also be included which, among other things, provides additional data for use by decoders. The DigiCipher® II standard provides for the transport of additional user data after the sequence header, in order to identify a DigiCipher® II signal and the use of any special video compression techniques used within a sequence, including DigiCipher® special prediction and block motion estimation.

In both the MPEG-2 and DigiCipher® II syntaxes, a sequence display extension containing, e.g., video format and color description information, is provided in addition to the sequence extension and user data. A subsequent group of pictures header provides, among other information, a time code. Thereafter, a picture header is provided which includes various information pertaining to a corresponding picture in a sequence of pictures to be displayed. A picture extension and, ultimately, the actual picture data to be decoded and reproduced for viewing, is then provided. It is noted that MPEG does not specify the order in which various extensions (such as the sequence display extension) or the user data must be transmitted beyond the fact that they must be after the sequence extension and before the GOP header (if provided) or the picture

header. MPEG does not require GOP headers to be sent, and such headers may be bypassed in particular implementations.

5 In a practical transmission system it may be necessary to include additional data at different times for specific purposes, such as providing closed captioning, VITS, auxiliary real time video, and AMOL data. Such additional data may be carried in the vertical blanking interval (VBI) portions of
10 a television signal, and is referred to herein as "VBI user information." Typically, the insertion of such VBI user information would require a transport syntax to allocate and reserve fixed length portions into which the VBI user information is inserted. If
15 the VBI user information is not used, the fixed length portions would be unusable for other information and bandwidth would be wasted.

It would be advantageous to provide a transport syntax for digital television data that would
20 accommodate various types of VBI user information which may or may not be used at any given time, without requiring space to be reserved for the information in advance. Such a scheme would enable the economical management of bandwidth while
25 providing flexibility as to the transport of VBI user information. The present invention provides a transport method and apparatus enjoying the aforementioned advantages.

SUMMARY OF THE INVENTION

In accordance with the present invention, a bandwidth efficient method is provided for using a digital television data stream to transport variable amounts of different types of information carried in a vertical blanking interval (VBI) portion of a television signal. Information to be transported is extracted from portions of input video data that correspond to vertical blanking intervals of successive video frames. First identifiers are provided for the extracted information. The first identifiers specify a count of a particular type of information associated with the identifier. The first identifiers and the associated information are inserted into VBI related portions of the digital television data stream. The data stream, including the first identifiers and the information, is then communicated to a receiver. The first identifiers enable the adjustment of the data stream to accommodate variable amounts of different types of information without space being reserved for specific amounts and types of information in advance.

Second identifiers can be provided for the extracted information. The second identifiers designate a priority of the particular type of information specified by the first identifiers. In an illustrated embodiment, the first and second

identifiers precede the information associated therewith in the data stream. Each second identifier follows a counterpart first identifier. Thus, the syntax provides a first identifier specifying a count of a particular type of information, followed by a second identifier specifying a priority of the information, followed by the information itself. It should be appreciated that each type of information (i.e., "construct," the size of which is dictated by the count) may include a priority, such that a video picture can include constructs of various priorities.

The extracted information can comprise, for example, one or more of closed caption data, ~~non~~ ~~realtime video data~~, sampled video data and AMOL data, referred to herein as VBI user information because it is provided in the VBI portions of a television signal. When the extracted information comprises non-realtime video data, the syntax provides sequence numbers and segment numbers for portions of the non-realtime video data. When the extracted information comprises AMOL data, identifiers are provided to designate whether the AMOL data is null data represented in an abbreviated form. For example, where the AMOL data comprises a string of zeros, the string can be runlength coded to avoid the need to send the entire string of zeros, thereby saving bandwidth. The syntax can

also provide identifiers to designate parity values for the AMOL data.

5 In the illustrated embodiment, the digital television data stream is assembled to provide a first identifier in the VBI portions specifying a count for closed caption data, followed by a first identifier specifying a count for non-realtime video data, followed by a first identifier specifying a count for sampled video data, followed by a first
10 identifier specifying a count for AMOL data. It will be appreciated that the syntax formed in this order constitutes only one possible embodiment and that the ordering can be rearranged without departing from the concept of the present invention.

15 The present invention also provides a method for decoding information communicated in the manner set forth above. In such a decoding method, the digital television data stream is received at a decoder. As the VBI portions of the data stream are
20 reached, the first identifiers are detected. Closed caption data is processed when the first identifier specifying the count of closed caption data indicates the presence of such data. Non-realtime video data is processed when the first identifier
25 specifying the count of non-realtime video data indicates the presence of such data. Sampled video data is processed when the first identifier specifying the count of sampled video data indicates the presence of such data. AMOL data is processed

when the first identifier specifying the count of AMOL data indicates the presence of such data.

Where second identifiers are provided in the VBI portions to designate a priority of the particular type of information specified by the first identifiers, the second identifiers are detected in the received data stream. The processing of particular information is inhibited if the priority thereof identified by the corresponding second identifier is not a priority supported by the decoder. In this manner, decoders having different capabilities can be deployed in the field for operation with a common data stream. Information that is not supported by a particular decoder will not adversely affect the operation of the decoder since the decoder will be informed by the priority identifier that it is to ignore the particular information.

Receiver apparatus is provided for decoding information contained in digital television signals. The receiver includes means for detecting information in a vertical blanking portion of a received digital television signal identifying a count of closed caption data, a count of non-realtime video data, a count of sampled video data, and a count of AMOL data that may be present in the vertical blanking portion. Means responsive to the detecting means process the closed caption data when the count of closed caption data indicates the

presence of such data in the vertical blanking portion. Means responsive to the detecting means process non-realtime video data when the count of non-realtime video data indicates the presence of such data in the video blanking portion. Means responsive to the detecting means process sampled video data when the count of sampled video data indicates the presence of such data in the vertical blanking portion. Means responsive to the detecting means process the AMOL data when the count of AMOL data indicates the presence of such data in the vertical blanking portion.

The receiver apparatus can further comprise means for detecting information identifying a priority of the received data. Means are provided for inhibiting the processing of the data if the priority is not supported by the receiver apparatus. In an illustrated embodiment, the received digital television signal has an MPEG format.

Apparatus is provided for communicating information in a bandwidth efficient manner in a digital television data stream. Means are provided for extracting information from portions of digital video data that correspond to vertical blanking intervals of successive video frames. At least one particular type of information extracted by the extracting means is quantified and a first identifier is associated therewith. The first identifier specifies a count of the particular type

of information following the identifier. Means are provided for combining the extracted information including the first identifiers associated therewith with active video portions of the digital video data to form the digital television data stream. The first identifiers enable the adjustment of the data stream to accommodate variable amounts and types of information without space being reserved for the information in advance.

10 The apparatus can further comprise means for associating second identifiers with the extracted information. The second identifiers designate a priority of the particular type of information specified by the first identifiers. In the
15 illustrated embodiment, each of the second identifiers is inserted into the data stream following a counterpart first identifier. The first
15 identifiers can provide counts for closed caption data, non-realtime video data, sampled video data
20 and AMOL data.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a digital video encoder that incorporates the present invention;

5 Figure 2 is a more detailed, conceptual block diagram of the syntax processor illustrated in Figure 1;

Figure 3 is a block diagram of a video decompression processor incorporating the present invention; and

10 Figure 4 is a more detailed, conceptual block diagram of the video reconstruction circuit illustrated in Figure 3 as it relates to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides a bandwidth efficient method and apparatus for using a digital television data stream to transport variable amounts of different types of information carried in the VBI portion of a television signal. The information of concern is a subset of a type of user data referred to as "picture user data" to distinguish it from "sequence user data" in an MPEG or DigiCipher® II transport stream. This subset, referred to herein as VBI user information, comprises closed caption data, non-realtime video data, sampled video data, and AMOL data. With the exception of non-realtime video, each of these categories of picture user data are updated each picture. Non-realtime video is updated over a period of several to many pictures. The picture user data is transported in portions of successive video frames which correspond to VBI lines. Each VBI line is represented by 720 eight-bit luminance samples and 720 eight-bit chrominance samples before processing in accordance with the present invention.

Figure 1 illustrates, in block diagram form, an encoder for processing raw digital video data into a syntax in which variable amounts of different types of VBI user information can be communicated in a digital television data stream. The raw digital video, such as video complying with the Society of

Motion Picture and Television Engineers (SMPTE) standard is input to a serial receiver 12 via terminal 10. The serial receiver serializes the data which is input in a parallel format. The
5 serialized data is buffered in a buffer 14, which can comprise a conventional first-in first-out (FIFO) register. A video parser 16 interprets the syntax of the serialized data and strips out various information such as that identifying the start of a
10 new line, the start of a new frame, and the raw luminance and chrominance data. The luminance and chrominance data is input to a demultiplexer 18 where it is separated into data portions corresponding to vertical blanking intervals of
15 successive video frames and the active video portions of those frames. Demultiplexer 18 also determines if synchronization of the acquired data stream has been lost, and if so, outputs a "sync loss" signal to a video compression processor 22,
20 which also receives the active video to be compressed. The video compression processor is a type well known in the art, such as described in U.S. patents 5,376,968; 5,235,419; 5,091,782; or 5,068,724.

25 The data contained in the VBI portions of the digital video input signal is output from demultiplexer 18 to random access memories (RAMs) 20, which include both a luminance RAM and a chrominance RAM. The RAMs store the data until

required by a syntax processor 24 which extracts the VBI user information and builds a syntax enabling the information to be transported efficiently in the VBI portions of a digital television data stream to be communicated to a corresponding decoder, e.g., at an end user location.

The syntax provided by the syntax processor is stored in a header FIFO 28, which is used to assemble transport headers for, e.g., an MPEG or DigiCipher® II implementation of the digital television data stream. The header FIFO provides the syntax information to a barrel shifter 30 that combines the header with the compressed active video from a video coder 26. The video coder 26 codes the compressed video from the video compression processor 22 in a well known manner using, for example, Huffman coding to provide codewords (CW), codeword lengths (CL) and data tags which identify the coded information. The output from barrel shifter 30 is a data stream containing the active video separated by headers which contain information necessary to decode the active video. This data stream is stored in a video buffer 32 which provides the data on an as needed basis to a packetizer 34. The packetizer is a conventional component which assembles the data into transport packets in accordance with a transport stream standard such as the MPEG-2 or DigiCipher® II standard.

Figure 2 is a conceptual block diagram showing the operation of syntax processor 24 in greater detail. Digital video (e.g., from video parser 16 in Figure 1) is input via terminal 40 to a VBI demultiplexer and RAMs 42. This component is actually a combination of demultiplexer 18 and VBI RAMs 20 illustrated in Figure 1. The demultiplexer outputs active video to the active video processing components 76, which comprise video compression processor 22 and video coder 26 illustrated in Figure 1.

Portions of the VBI data containing closed caption information are input from the demultiplexer and RAMs 42 to a closed caption processing path generally designated 41. Non-realtime video data from the digital video data stream input to terminal 40 is output by the demultiplexer and RAMs 42 to a non-realtime video processing path generally designated 43. Similarly, sampled video is output to a sampled video processing path generally designated 45, and AMOL data is output to an AMOL processing path generally designated 47. Each of the processing paths 41, 43, 45 and 47 provide sample interpretation, count insertion, priority insertion and other syntax insertion in accordance with the prescribed picture user data bitstream syntax. This syntax is described below using the formal grammar used by the MPEG transport standard.

The MPEG grammar is a C-language-like syntax and is a method of describing continuous and possibly variable rate sequences of bits, instead of specifying a procedural program and its functions as in the computer language C. The first column of the syntax contains the syntax element. The second column gives the length of the syntax elements in bits and the third column identifies the syntax type. The types are bs1bf (bit string left-most bit first) and uimsbf (unsigned integer most significant bit first). The header "user_data () (...)" indicates that the syntax elements within the braces are a named set and may be invoked elsewhere in the syntax by simply using the designation "user_data ()". A conditional occurrence of bit structures may be indicated with the usual "if" tests. The customary relational operators well known in the C-language are also available. Loop structures are possible and use the standard C loop header syntax. The syntax table is accompanied by a set of semantics, providing definitions for each previously undefined syntax field and placing constraints on their use. The following picture user data bitstream syntax and bitstream semantics represent a preferred embodiment of the present invention:

Syntax	No. Bits	Mnemonic
user_data() {		
user_data_start_code	32	bslbf
user_data_type_code	8	uimsbf
if (user_data_type_code == '0x03') {		
reserved	1	bslbf
picture_special_frame_flag	1	bslbf
picture_special_field_flag	1	bslbf
picture_sp_mv_scale_flag	1	bslbf
reserved	3	bslbf
vbi_data_flag	1	bslbf
if (vbi_data_flag) {		
cc_count	5	uimsbf
for (i=0 ; i<cc_count ; i++) {		
cc_priority	2	uimsbf
field_number	2	uimsbf
line_offset	5	uimsbf
cc_data_1[1:8]	8	bslbf
cc_data_2[1:8]	8	bslbf
marker_bit	1	bslbf
}		
non_real_time_video_count	4	uimsbf
for (i=0 ; i<non_real_time_video_count ; i++) {		
non_real_time_video_priority	2	uimsbf
sequence_number	2	uimsbf
non_real_time_video_field_number	1	uimsbf
line_offset	5	uimsbf
if (sequence_number != '00') {		
segment_number	5	uimsbf
for (i=0 ; i<32 ; i++) {		
non_real_time_video_		
y_data[7:0]	8	uimsbf
}		
for (i=0 ; i<16 ; i++) {		
non_real_time_video_		
cb_data[7:0]	8	uimsbf
non_real_time_video_		
cr_data[7:0]	8	uimsbf
}		
}		
}		
}		
}		
sampled_video_count	3	uimsbf

```

    for (i=0 ; i<sampled_video_count ; i++) (
        sampled_video_priority          2      uimsbf
        field_number                    2      uimsbf
        line_offset                     5      uimsbf
        for (i=0 ; i<704 ; i++) (
            sampled_video_y_data[7:0]    8      uimsbf
        )
        for (i=0 ; i<352 ; i++) (
            sampled_video_cb_data[7:0]   8      uimsbf
            sampled_video_cr_data[7:0]   8      uimsbf
        )
    )

    amol_count                          4      uimsbf
    for (i=0 ; i<amol_count ; i++) {
        amol_priority                  2      uimsbf
        field_number                   2      uimsbf
        line_offset                    5      uimsbf
        frame_counter[4:0]             5      uimsbf
        amol_data_parity               1      uimsbf
        non_zero_amol_flag             1      bslbf
        if (non_zero_amol_flag) {
            amol_data[1:20]            20     bslbf
            marker_bit                 1      bslbf
            amol_data[21:35]          15     bslbf
        }
    }

    reserved                           n      bslbf
}
next_start_code()
}

```

Picture User Data Bitstream Semantics

user_data_type_code -- An eight-bit code for picture user data, 03 in hexadecimal. Note that the encoder shall send no more than one picture user data construct after any given picture header.

picture_special_frame_flag -- When set to 1, this flag indicates that special frame prediction is used on the current picture. This flag overrides the value of **sequence_special_frame_flag**, and it is ignored for all pictures except P-pictures.

picture_special_field_flag -- When set to 1, this flag indicates that special frame prediction is used on the current picture. This flag overrides the value of **sequence_special_field_flag**, and it is ignored for all pictures except P-pictures.

picture_sp_mv_scale_flag -- Has meaning only when either the **picture_special_frame_flag** or **picture_special_field_flag** is set, affecting the scaling for the current P-picture. When set to 1, a scaling of 3/2 and 1/2 is indicated, while 0 indicates unity scaling. This flag overrides the value of **sequence_sp_mv_scale_flag**, and is ignored except for P-pictures where either **special_frame_flag** or **special_field_flag** is set to 1.

vbi_data_flag -- Indicates that one or more VBI data constructs follow (closed captions, real-time or non-real-time sampled video, and/or AMOL).

NOTE: In the preferred embodiment, the encoder will satisfy all the following general requirements with regard to VBI data:

1. The encoder shall pack picture user data in decode order, storing the VBI data to be reconstructed from a given picture in the picture user data of the same picture.

2. The encoder shall transport the VBI data for the repeated field with the picture that transports the video data for the field to be repeated.

3. The encoder shall transport, for a given picture and VBI data type, all the VBI data for the first display field followed

by all the VBI data for the second display field followed by all the VBI data for the third (repeated) display field, if present. Also, for a given picture, VBI data type, and field, the encoder shall transport all the VBI data for the first line followed by all the VBI data for the second line, etc.

cc_count -- A five-bit integer (values in the range [0:31]) indicating the number of closed caption constructs following the field. All such constructs must occur in the intended display order, assuming an interlaced display.

cc_priority -- A number between 0 and 3 indicating the priority of constructs in picture reconstruction where different levels of hardware capability exist. For closed caption constructs, up to four lines per display field (including Line 21) can be labeled as priority zero.

field_number -- The number of the field, in display order, from which the VBI data originated, interpreted as follows:

<u>Value:</u>	<u>Meaning:</u>
00	Forbidden
01	1st display field
10	2nd display field
11	3rd display field (the repeated field in film mode).

line_offset -- A five-bit integer giving the offset in lines from which the VBI data originated, relative to the base VBI frame line (line 10 of NTSC field 1, line 273 of NTSC field 2, line 6 of PAL field 1, and line 319 of PAL field 2), as specified in CCIR Report 624-4.

cc_data_1[1:8] -- Data for the first closed caption character for this field such that the first received bit is the first bit reconstructed on the video line as displayed from left to right.

cc_data_2[1:8] -- Data for the second closed caption character for this field such that the first received bit is the first bit reconstructed on the video line as displayed from left to right.

The encoder shall compress closed caption data to the 16-bit representation and shall pack these bits into picture data starting with the least significant bit of the first character and ending with the most significant bit of the second character.

non_real_time_video_count -- Indicates the number of non-real-time video constructs that follow. This field can have values of 0 through 15. All such constructs must occur in the intended display order, assuming an interlaced display.

non_real_time_video_priority -- A number between 0 and 3 used by the decoder to determine if it is required to reconstruct the particular non-real-time VBI line. For non-real-time sampled video, only a single line may be labeled as priority zero. Thus the decoder that can reconstruct one line need only reconstruct priority 0.

sequence_number -- Numbers each sequence of non-real-time video segments, starting from 1 and counting to 3, before rolling over to 1 again. A sequence_number of 0 indicates the non-realtime sampled video line is not to be reconstructed (is inactive) until a segment is received with a non-zero sequence_number and therefore the corresponding fields do not follow for this construct. The sequence number shall be incremented by one between sequences.

non_real_time_video_field_number -- A one-bit number indicating the field into which the decoder must reconstruct the non-real video line, interpreted as follows:

<u>Value:</u>	<u>Meaning:</u>
0	Odd field
1	Even field

segment_number -- The number of the non-realtime sampled video segment starting with 0001.

The encoder shall segment non-realtime sampled video into 64-byte segments and transport each as an array of 32 luminance (Y) samples followed by an array of 16 chrominance sample pairs (Cb,Cr), starting with the most significant bit of the leftmost sample. All segments of the sequence shall be transmitted in order before any segment of a new sample of the same non-realtime video line.

non_real_time_video_y_data[7:0] The non-realtime sampled video luminance data for this segment such that the first bit is the most significant bit of the code word.

non_real_time_video_cb_data[7:0] -- The non-realtime sampled video chrominance Cb data for this segment such that the first bit is the most significant bit of the code word.

non_real_time_video_cr_data[7:0] -- The non-realtime sampled video chrominance Cr data for this segment such that the first bit is the most significant bit of the code word.

sampled_video_count -- Indicates the number (values 0 through 7) of real-time sampled video constructs that follow this field. All such constructs must occur in the intended display order, assuming interlaced display.

sampled_video_priority -- A number between 0 and 3 used by the decoder to determine if it is required to reconstruct the

particular sampled video line. For real-time sampled video, only a single line may be labeled as priority zero. Thus the decoder that can reconstruct one line need only reconstruct priority 0.

sampled_video_y_data[7:0] -- The real-time sampled video luminance data for this construct such that the first bit is the most significant bit of the code word.

sampled_video_cb_data[7:0] -- The real-time sampled video chrominance Cb data for this construct such that the first bit is the most significant bit of the code word.

sampled_video_cr_data[7:0] -- The real-time sampled video chrominance Cr data for this construct such that the first bit is the most significant bit of the code word.

amol_count -- Indicates the number of AMOL constructs that follow this field and can have values of 0 through 15. All such constructs must occur in the intended display order, assuming an interlaced display.

amol_priority -- A number between 0 and 3 used by the decoder to determine if it is required to reconstruct the particular AMOL line. For AMOL, only a single line may be labeled as priority zero. Thus the decoder that can reconstruct only line 20 need only reconstruct priority 0.

frame_counter[4:0] -- The frame address for an AMOL construct where the msb corresponds with AMOL bit #8 and the lsb corresponds with AMOL bit #12 of ACN 403-1122-000.

amol_data_parity -- The parity value for an AMOL construct that corresponds with AMOL bit #48 of ACN 403-1122-000.

`non_zero_amol_flag` -- Set when AMOL bits #13 through #47 are not all zero and therefore the value of these bits are conveyed in the following field.

`amol_data[1:35]` -- The value of AMOL bits #13 through #47 of ACN 403-1122-000, where `amol_data[1]` corresponds with AMOL bit #13 and `amol_data[35]` corresponds with AMOL bit #47.

The above syntax is assembled by the components of syntax processor 24 illustrated in Figure 2. In the preferred embodiment, these components are implemented in firmware. In path 41, the closed caption data is processed by a sample interpretation function which extracts 16 bits of closed caption data from a total of 1408 samples (704 samples luma, 704 samples chroma) of each VBI line containing closed caption data. The closed caption (CC) count insertion function 46 counts the number of closed caption constructs extracted from the current video field. As indicated in the picture user data bitstream semantics, the count can have a value of from 0-31. The CC priority insertion function 48 inserts the priority of the closed caption data, so that decoders which support the current priority will decode the closed caption data and decoders which do not support the present priority will not decode the data. All other syntax information, such as the field number, line offset, and marker bits are inserted by the "other syntax insertion"

function 50. The syntax output from path 41 corresponds to that indicated above in the picture user data bitstream syntax under the heading "CC_count."

5 Non-realtime video is processed in path 43. The encoder needs to segment the VBI data in order to spread the load over multiple pictures when the picture user data load changes by a significant percentage of the allocated service data rate. This
10 applies primarily to non-realtime video. In order to reduce the complexity of the algorithm that the encoder uses to spread the non-realtime video loading over pictures, the non-realtime video update rate is limited to values which are integer
15 multiples of twenty-two pictures. In order to provide robustness to the loss of transport packets, especially the last segment of a non-realtime video sequence, segment and sequence numbers are provided in the syntax for non-realtime video to allow the
20 decoder to detect lost non-realtime video segments. Since non-realtime video data is transported in segments, it is preferable for the decoder to have the capability of double buffering non-realtime video data to allow display of the current line
25 during receipt of the next line. In order to instruct the decoder to stop waiting for the arrival of new non-realtime video segments and to stop reconstructing a current line, the encoder will transmit several constructs for the particular field

and line with a sequence value of zero. This signals the decoder to stop (i.e., deactivate) a non-realtime video line. Further, the encoder will transmit all segments of a non-realtime video sequence in order before transmitting any segment of a new sample of the same non-realtime video line. The sequence number is incremented by one between non-realtime video sequences. The transition of a non-realtime video line from active to inactive can be indicated by the encoder by packing picture user data for that non-realtime video line with the sequence number set to zero for four pictures. Also, no corresponding luminance or chrominance samples are transported in this case, as specified in the picture user data syntax.

Non-realtime video data is segmented into 64-byte segments for transport as left-most sample first. The encoder transports each non-realtime video data segment as an array of 32 luminance samples (Y) starting with the most significant bit of the left-most sample. The luminance samples are followed by an array of 16 chrominance sample pairs (Cb, Cr) starting with the most significant bit of the left-most sample. The encoder is capable of sampling, compressing and transporting one line of non-realtime video with each video frame. Non-realtime video is sampled at rates ranging from once per 22 pictures to once per 484 pictures in increments of 22 pictures. Non-realtime video is

processed at full resolution of 704 horizontal samples per line. The segmenting of the non-realtime video data over 22 pictures is performed by the non-realtime video sample interpretation function 52. 704 samples each of luminance and chrominance data are output from the sample interpretation function in samples of 32 bytes each. A count of non-realtime video data per frame is maintained by non-realtime video (NRV) count insertion function 54. This provides the non_real_time_video_count set forth in the picture user data bitstream syntax and semantics. The non-realtime video priority is inserted by NRV priority insertion function 56, to enable decoders to ignore those priorities that they do not support. The remaining non-realtime video syntax, including the sequence number, non-realtime video field number, line offset and segment number are inserted by the "other syntax insertion" function 58 in non-realtime video processing path 43. It is noted that the non-realtime video feature can be used to support a vertical interval test signal (VITS), by transporting the 704 samples of VITS over the period of several frames. Other data, such as a vertical interval reference (VIR) signal, can also be transported using the non-realtime video path. By segmenting the data and sending it piecemeal over a plurality of lines, the non-realtime video capability of the syntax enables the bandwidth used

by data services such as VITS to be significantly reduced.

5 Sampled video processing is provided in path 45. Sampled video is similar to non-realtime video, but is provided real time. Thus, instead of segmenting the data contained in a video line over a plurality of frames, a new video line is provided every frame or field. Sampled video can be used to support any generic video that a broadcaster or
10 programmer wants to transmit.

 The sampled video data is interpreted by sampled video sample interpretation function 60. The sampled luminance and chrominance information is counted by a sampled video (SAV) count insertion
15 function 62. The sampled video priority is inserted by SAV priority insertion function 64 to enable decoders that do not support the SAV priority to ignore the SAV data. Other syntax insertion, including field number and line offset, is provided
20 by the "other syntax insertion" function 66 in path 45.

 Programming lineup information used by the A.C. Nielson Company for market research and referred to as "Automated Measurement of Lineup" (AMOL) is also
25 provided by the user data syntax. This data is used by a market research processor provided to various television viewers and records every program watched and the time at which it is watched. Television

commercials have their own AMOL and this feature can be used by advertisers to verify the proper broadcasting of commercials during a program lineup. The AMOL information is inserted into line 22 of field 2 of each television frame in the National Television Systems Committee (NTSC) broadcasting standard. Line 22 is an active video line, and thus a decoder may commence processing active video with line 23 instead of line 22 for NTSC signals. Within a 30-frame sequence, the AMOL line for each frame will typically be present, but the data for most frames will generally be null. However, the definition of the parity bit is subject to change in each AMOL line. Thus, the syntax includes a bit that indicates whether or not the thirty-five AMOL data bits are zero for each frame, allowing the syntax to avoid the need to send the zero data. Instead, the non_zero_AMOL_flag bit of the syntax is cleared to indicate, using a single bit, that the entire AMOL line is null. The syntax always sends the parity bit, regardless of the data content, since the parity is subject to change even when no data is present.

The processing of AMOL data by path 47 illustrated in Figure 2 is similar to the processing of the sampled video. Interpretation of the AMOL data is provided by the AMOL sample interpretation function 68. If AMOL data is present, it is counted and the data count is inserted into the syntax by

the AMOL count insertion function 70. The AMOL priority is inserted by function 72 to enable decoders which do not support this AMOL priority to skip over the AMOL data. The remaining AMOL syntax elements, including the field number, line offset, AMOL data parity and non-zero AMOL flag, as well as a marker bit if necessary are inserted by the "other syntax insertion" function 74 of AMOL processing path 47.

The VBI syntax comprising all of the closed caption, non-realtime video, sampled video and AMOL data contained in the digital video signal is multiplexed with the active video output from the active video processing components 76 in a VBI user data and video multiplexer 78. This multiplexer provides the functions of the header FIFO 28 and barrel shifter 30 illustrated in Figure 1. The multiplexed data stream output from multiplexer 78 is buffered and packetized to provide the final transport stream for communication to a population of decoders.

Figure 3 is a block diagram of a video decompression processor (i.e., decoder) for processing a received data stream that contains the VBI user data syntax detailed above. The video decompression processor (VDP) incorporates a memory manager 130 that addresses an external DRAM 122 to store and retrieve video data necessary to

reconstruct a television program at a receiver. The processor, generally designated 120, is a pipelined processor designed to decode both the transport layer (i.e., control and other non-video
5 information) and the video layer of the compressed bitstream input via terminal 110, sometimes referred to as the "transport packet interface" of the video processor.

A user processor interface is provided at
10 terminal 114 for control of the video data processor via an M-bus controller 150 that configures various registers in processor 120. The M-bus is a two-wire, bidirectional serial bus which provides a simple and efficient means of data exchange between
15 devices, and is fully compatible with the I²C bus standard.

An interface to the DRAM 122 is provided via address lines 124 and data lines 126. In the example illustrated in Figure 3, DRAM 122 has a nine
20 bit address port and a thirty-two bit data port.

A video output interface 138 is provided for the decompressed, reconstructed video which may, for example, be output as a standard CCIR (International Radio Consultive Committee) 656, eight bit, twenty-
25 seven Mhz multiplexed luminance (Y) and chrominance (Cr, Cb) signal.

A test interface can be provided via terminal 162 to a conventional JTAG (Joint Test Action Group) controller 160. JTAG is a standardized boundary scan methodology used for board-level testing to
5 detect faults in package and board connections, as well as internal circuitry.

The video decompression processor 120 receives a clock signal via terminal 112. The clock provides timing information that is used, e.g., to enable a
10 transport syntax parser 132 to recover timing information and video information from transport packets contained in a packetized data stream input via terminal 110. An acquisition and error management circuit 134 utilizes a program clock
15 reference (PCR) and decode time stamp (DTS) detected by a video syntax parser 140 to synchronize the start of picture decoding. This circuit sets vertical synchronization and provides global synchronization for all video decode and display
20 functions.

The video layer is buffered in an input buffer (FIFO) configured in the external DRAM 122 by memory manager 130. The video syntax parser 140 receives the compressed video data output from the DRAM FIFO
25 via memory manager 130, and separates the motion vector information from the coefficients describing the video information. The coefficients are processed by a Huffman decoder 152, inverse

quantizer 154, and inverse discrete cosine transform (IDCT) processor 156.

5 Motion vectors are recovered and used to address previously decoded video frames required for reconstructing a current video frame. In particular, a motion vector decoder 142 decodes the motion vectors received from video syntax parser 140 and passes them to a prediction address generator 144. The prediction address generator provides
10 address information necessary to retrieve, via memory manager 130, the necessary anchor frame (i.e., intraframe (I) or prediction (P) frame) data to enable prediction calculator 146 to provide a prediction signal necessary to reconstruct a current
15 frame block. Differential decoder 148 combines the prediction data with the decoded coefficient data to provide decompressed video data. The decompressed data is stored in appropriate buffers of DRAM 122 via memory manager 130. It should be appreciated
20 that the video decompression processes carried out by motion vector decoder 142, prediction address generator 144, prediction calculator 146, differential decoder 148, Huffman decoder 152, inverse quantizer 154 and IDCT 156 are generally
25 conventional and well understood by those skilled in the art.

Memory manager 130 schedules all activity on the external DRAM address and data buses 124, 126

and efficiently addresses DRAM 122. The memory manager insures that the data transfer requirements of the input FIFO portion of DRAM 122, the video syntax parser 140 and the video reconstruction circuit 136 (as well as prediction calculator 146 and differential decoder 148) are all met. The video reconstruction circuit 136 calculates a current picture and processes the VBI user data in order to insert any closed caption, non-realtime video (including VITS), sampled video and AMOL data, as well as any test pattern data, for output on video output line 138. The display of the output data is synchronized by comparing the time specified by the decoder time clock to a presentation time stamp (PTS), which indicates when the video is to be presented for display. A determination of when the decoding and display of a video frame must commence is made by comparing a decode time stamp (DTS) to the PTS.

DRAM 122 is illustrated as an external memory and may be provided by a plurality of DRAM chips, such as two, four Mbit (megabit, i.e., 2^{20} bits) DRAMs for an eight Mbit implementation or four, four Mbit DRAMs for a sixteen Mbit implementation. It should be appreciated that in future implementations, and as memory technology advances, DRAM 122 may be provided as internal memory within the video decompression processor. The DRAM is mapped to provide various decode and output video

buffers as well as a circular FIFO buffer for the compressed input video bitstream. The DRAM may also be used to provide a test pattern buffer, a VITS buffer and a closed captioning display reordering
5 buffer as well as to store various picture structure data necessary to properly display the decoded video frames. The DRAM can be reinitialized via memory manager 130 to provide different memory maps as required when variables are modified such as PAL or
10 NTSC video, eight or sixteen Mbit memory configuration, and whether B-frames are present.

As indicated above, the memory manager 130 schedules all of the activity on the external DRAM buses including the data transfer requirements of
15 the input FIFO, the video parser and the video reconstruction circuit. The memory manager also performs the required DRAM refresh in a conventional manner. For example, the same row in each of two or four external DRAMs can be refreshed simultaneously.

20 When a packetized bitstream containing compressed video data is input to terminal 110 of video decompression processor 120, video frames represented by the compressed data are reconstructed one at a time. Initially, a full frame of video
25 data will have to be received and stored in DRAM 122. Information for subsequent video frames can comprise a subset of the full video frame which, when added to prediction data from the prior video

frame (stored in DRAM 122) will result in the reconstruction of a full frame.

Figure 4 is a functional block diagram illustrating the reconstruction of the VBI user information into the digital video data stream at the decoder. The compressed bitstream is input via terminal 170 to a VBI user data demultiplexer 172. The demultiplexer function is provided by the video syntax parser 140 of Figure 3, which demultiplexes the compressed bitstream to provide the closed caption user data, non-realtime video user data, sampled video user data, AMOL user data, and the active video. Active video processing is provided by function 206 which receives the active video, decompresses it (e.g., using well known motion estimation and compensation techniques) and outputs the decompressed video to a VBI and video multiplexer 208.

The closed caption data is processed by a closed caption processing path generally designated 171. The closed caption count is removed by function 174, which identifies the number of closed caption constructs to be processed for the current video field or frame. The closed caption priority indicated by the user data syntax is then checked to determine if it is a priority that the decoder supports. If so, the priority checking function 176 will enable the closed caption syntax interpretation

function 178 to interpret the remaining syntax,
including the field number and line offset, and to
recover the actual closed caption data. Any marker
bits, which are used to prevent the false detection
5 of a new start code by the decoder, will be ignored.

After the syntax has been interpreted, the VBI
lines carrying the closed caption data are
reconstructed by function 180. The 16 bits of
closed caption data from the syntax interpretation
10 function 178 are reconstructed into a conventional
VBI line having the equivalent of 704 luminance
samples and 704 chrominance samples. The
reconstructed lines are output to VBI and video
multiplexer 208 where they are assembled with the
15 non-realtime video, sampled video and AMOL data
recovered by paths 173, 175 and 177, respectively,
and the decompressed active video output from the
active video processing function 206.

The non-realtime video path 173, sampled video
20 path 175 and AMOL path 177 operate similarly to the
closed caption path 171. The non-realtime video
count is removed by function 182, and priority
checking for non-realtime video is performed by
function 184. If the priority is supported by the
25 particular decoder, the non-realtime video syntax
will be interpreted by function 186 and the VBI line
carrying the non-realtime video data will be
reconstructed by function 188. The non-realtime

video feature can provide functions such as double buffering of the VITS line, checking of sequence numbers and dropping segments of the previous sequence when a segment of a new sequence is received, and checking for a "sequence=0" condition which indicates that the reconstruction of the given VITS line should be terminated.

Sampled video count is removed by function 190 and the sampled video priority is checked by function 192. If the decoder supports the sampled video priority, the syntax is interpreted by function 194 and the VBI lines carrying the sampled video data are reconstructed by function 196.

The AMOL count is removed by function 198 and the AMOL priority is checked by function 200. If the AMOL priority is supported, the AMOL syntax is interpreted by function 202. The VBI line carrying the AMOL data (i.e., line 22) is reconstructed by function 204.

The output of multiplexer 208 will contain all of the transmitted VBI user information together with the decompressed active video, in the original format presented to the VBI DEMUX and RAMs 42 illustrated in Figure 2. Thus, multiplexer 208 will output a reconstructed priority of the original digital video processed by the encoder.

It should now be appreciated that the present invention provides a method and apparatus for encoding, communicating and decoding picture user data for digital television. The picture user data syntax allows the transport of closed captions, non-realtime video, sampled video and AMOL. The encoder packs picture user data in decode order so that VBI data will arrive in the picture user data following the picture header of the picture into which the VBI line will be reconstructed. The presence of VBI data is conditional in the picture user data syntax. More particularly, a VBI data flag is provided which specifies whether or not the user data contains any VBI data. Count values preceding each set of VBI data constructs allow decoders to skip closed caption and sampled video data, if no such data is provided. Since the constructs for non-realtime video and AMOL depend on content, the count value is not sufficient to calculate the size of the set of constructs. Therefore, decoders must parse through these constructs if they support subsequent VBI data types, even though there may be no non-realtime video or AMOL data present.

For each picture which does not require any VBI data, the encoder will clear the VBI data flag and not include any of the subsequent constructs specified in the picture user data syntax. In the case of film mode processing (e.g., 3:2 pulldown), the encoder will transport the VBI data for the

repeated field with the picture that transports the video data for the field to be repeated. The encoder will transport, for a given picture and VBI data type, all of the VBI data for the first display field followed by all of the VBI data for the second display field followed by all of the VBI data for the third (repeated) display field, if required. For a given picture, VBI data type and field, the encoder will transport all of the VBI data for the first line followed by all of the VBI data for the second line, etc. As an example, the closed caption data for a given picture will be transported in the following order for a three-field film mode picture with a display order f2, f1, f2 and closed captions on lines 14, 16 and 21 of field 2 and lines 15 and 21 of field 1:

... d1-14, d1-16, d1-21, d2-15,
d2-21, d3-14, d3-16, d3-21 ...

where f1 is the odd field, f2 is the even field, d1 is the first display field, d2 is the second display field, and d3 is the third display field.

It is important to note that the encoder should not use line offset values which indicate reconstruction of VBI services into active video. In a preferred implementation, the encoder compresses closed caption data to a 16-bit representation. The 16 bits are packed into the picture user data in the order in which they occur

in the video line from left to right, starting with the least significant bit of the first character and ending with the most significant bit of the second character.

5 The decoder does not require picture user data to accompany any or all of the pictures. All VBI data from the picture user data of the current service's video syntax will be received by the decoder. The decoder will not reconstruct a given
10 VBI data construct unless the priority field of the construct indicates that the priority is supported by the decoder.

 In processing non-realtime video data, the decoder will search for the first segment to
15 indicate the start of a non-realtime video data sequence. The decoder will not consider all of the non-realtime video segments to be received until it has received each segment of the sequence in the proper order. A non-realtime video service will not
20 be reconstructed until all segments have been received, at which time non-realtime video is processed at full resolution. The decoder will then display the current non-realtime video line while receiving the next non-realtime video line. The
25 next non-realtime video line will be displayed when all of its segments have been received.

 If the decoder receives a segment of a new non-realtime video sequence before receiving all

segments of the current non-realtime video sequence, it will discard the non-realtime video associated with the current sequence. Receipt of each segment of the new sequence will then commence.

5 Reconstruction of any non-realtime video line will be terminated if the picture user data of one or more consecutive picture user data constructs indicates that the non-realtime video line is not active. This indication can be provided by a
10 sequence number that is zero.

Although the invention has been described in connection with various specific embodiments, it should be appreciated that numerous adaptations and modifications may be made thereto without departing
15 from the spirit and scope thereof as set forth in the claims.

CLAIMS:

1. A bandwidth efficient method for communicating variable amounts of different types of user information in a digital television data stream, comprising the steps of:

extracting user information from portions of input video data that correspond to vertical blanking intervals (VBIs) of successive video frames;

providing a plurality of first identifiers for the extracted user information, each first identifier specifying a count of a particular type of user information associated with the particular identifier;

inserting said first identifiers and the associated user information into a video syntax for said digital television data stream in a predetermined order, said order being indicative of the type of user data following each first identifier in said video syntax; and

communicating said data stream including said first identifiers and user information to a receiver;

wherein said first identifiers enable the adjustment of said data stream to accommodate variable amounts of different types of user information without space being reserved for specific amounts and types of user information in advance.

2. A method in accordance with claim 1 comprising the further steps of:

providing second identifiers for the extracted user information; and
inserting said second identifiers into the video syntax; - ..

said second identifiers designating a priority of the particular type of user information specified by said first identifiers.

3. A method in accordance with claim 2 wherein said first and second identifiers precede the user information associated therewith in said video syntax, with each second identifier following a counterpart first identifier.

4. A method in accordance with claim 1 wherein the extracted user information includes non-realtime video data, said method comprising the further step of:

providing second and third identifiers for said non-realtime video data, said second identifiers designating a sequence number and said third identifiers designating segment numbers for portions of said non-realtime video data.

5. A method in accordance with claim 1 wherein the extracted user information includes AMOL data, said method comprising the further step of:

providing second identifiers to designate whether the AMOL data is null data represented in an abbreviated form.

6. A method in accordance with claim 5 comprising the further step of:

providing third identifiers to designate parity values for said AMOL data.

7. A method in accordance with claim 1 wherein the extracted user information inserted into said video syntax includes at least two of closed caption data, non-realtime video data, sampled video data, and AMOL data.

8. A method in accordance with claim 1 wherein the predetermined order of said first identifiers in said video syntax comprises a first identifier specifying a count for closed caption data, followed by a first identifier specifying a count for non-realtime video data, followed by a first identifier specifying a count for sampled video data, followed by a first identifier specifying a count for AMOL data.

9. A method in accordance with claim 1 wherein the predetermined order of said first identifiers in said video syntax comprises a first identifier specifying a count for closed caption data followed by a first identifier specifying a count for non-realtime video data.

10. A method for decoding user information communicated in accordance with the method of claim 7 comprising the steps of:

receiving said digital television data stream at a decoder and detecting said first identifiers therein; and

processing said closed caption data when the first identifier specifying said count of closed caption data indicates the presence of such data.

11. A method for decoding user information communicated in accordance with the method of claim 7 comprising the steps of:

receiving said digital television data stream at a decoder and detecting said first identifiers therein; and

processing said non-realtime video data when the first identifier specifying said count of non-realtime video data indicates the presence of such data.

12. A method for decoding user information communicated in accordance with the method of claim 7 comprising the steps of:

receiving said digital television data stream at a decoder and detecting said first identifiers therein; and

processing said sampled video data when the first identifier specifying said count of sampled video data indicates the presence of such data.

13. A method for decoding user information communicated in accordance with the method of claim 7 comprising the steps of:

receiving said digital television data stream at a decoder and detecting said first identifiers therein; and

processing said AMOL data when the first identifier specifying said count of AMOL data indicates the presence of such data.

14. A method in accordance with claim 7 wherein prior to communicating said digital television data stream to said receiver, second identifiers are provided in said video syntax, said second identifiers designating a priority of the particular type of user information specified by said first identifiers.

15. A method in accordance with claim 14 wherein the decoding of said user information comprises the further steps of:

detecting said second identifiers in the received data stream; and

inhibiting the processing of particular user information if the priority thereof identified by the corresponding second identifier is not a priority supported by the decoder.

16. A method in accordance with claim 8 comprising the further steps of:

providing second identifiers for the extracted user information, said second identifiers designating a priority of the particular type of user information specified by said first identifiers;

providing third and fourth identifiers for said non-realtime video data, said third identifiers designating a sequence number and said fourth

identifiers designating segment numbers for said non-realtime video portions; and

providing fifth and sixth identifiers for said AMOL data, said fifth identifiers designating whether the AMOL data is null data represented in an abbreviated form and said sixth identifiers designating parity values for said AMOL data.

17. Receiver apparatus for decoding user information contained in digital television signals, comprising:

means for detecting information from a video syntax carried by a received digital television signal identifying a count of closed caption data and a count of non-realtime video data;

means responsive to said detecting means for processing said closed caption data when said count of closed caption data indicates the presence of such data in said vertical blanking portion; and

means responsive to said detecting means for processing said non-realtime video data when said count of non-realtime video data indicates the presence of such data in said vertical blanking portion.

18. Receiver apparatus in accordance with claim 17 further comprising:

means for detecting information in said video syntax identifying at least one of a count of sampled video data and a count of AMOL data;

means responsive to said detecting means for processing said sampled video data when said count of sampled video data indicates the presence of such data in said vertical blanking portion; and

means responsive to said detecting means for processing said AMOL data when said count of AMOL data indicates the presence of such data in said vertical blanking portion.

19. Receiver apparatus in accordance with claim 17 wherein each of said processing means comprise:

means for detecting information identifying a priority of the received data; and

means for inhibiting the processing of the data if said priority is not supported by the receiver apparatus.

20. Receiver apparatus in accordance with claim 17 wherein said received digital television signal has an MPEG format.

21. Apparatus for communicating user information in a bandwidth efficient manner in a digital television data stream, comprising:

means for extracting user information from portions of digital video data that correspond to vertical blanking intervals of successive video frames;

means for quantifying a plurality of particular types of user information extracted by said extracting means and associating a first

identifier with each type of user information, said first identifiers specifying a count of the particular type of user information following the identifier; and

means for combining the extracted user information including the first identifiers associated therewith in a predetermined order with active video portions of said digital video data to form said digital television data stream, said predetermined order being indicative of the type of user data following each first identifier in said data stream;

wherein said first identifiers enable the adjustment of said data stream to accommodate variable amounts and types of user information without space being reserved for said user information in advance.

22. Apparatus in accordance with claim 21 further comprising:

means for associating second identifiers with the extracted user information, said second identifiers designating a priority of the particular type of user information specified by said first identifiers.

23. Apparatus in accordance with claim 22 wherein each of said second identifiers is inserted into said data stream following a counterpart first identifier.

24. Apparatus in accordance with claim 21 wherein said means for quantifying and associating provides a first identifier specifying a count for closed caption data and a first identifier specifying a count for non-realtime video data.

25. Apparatus in accordance with claim 24 wherein said means for quantifying and associating further provides a first identifier specifying a count for sampled video data and a first identifier specifying a count for AMOL data.

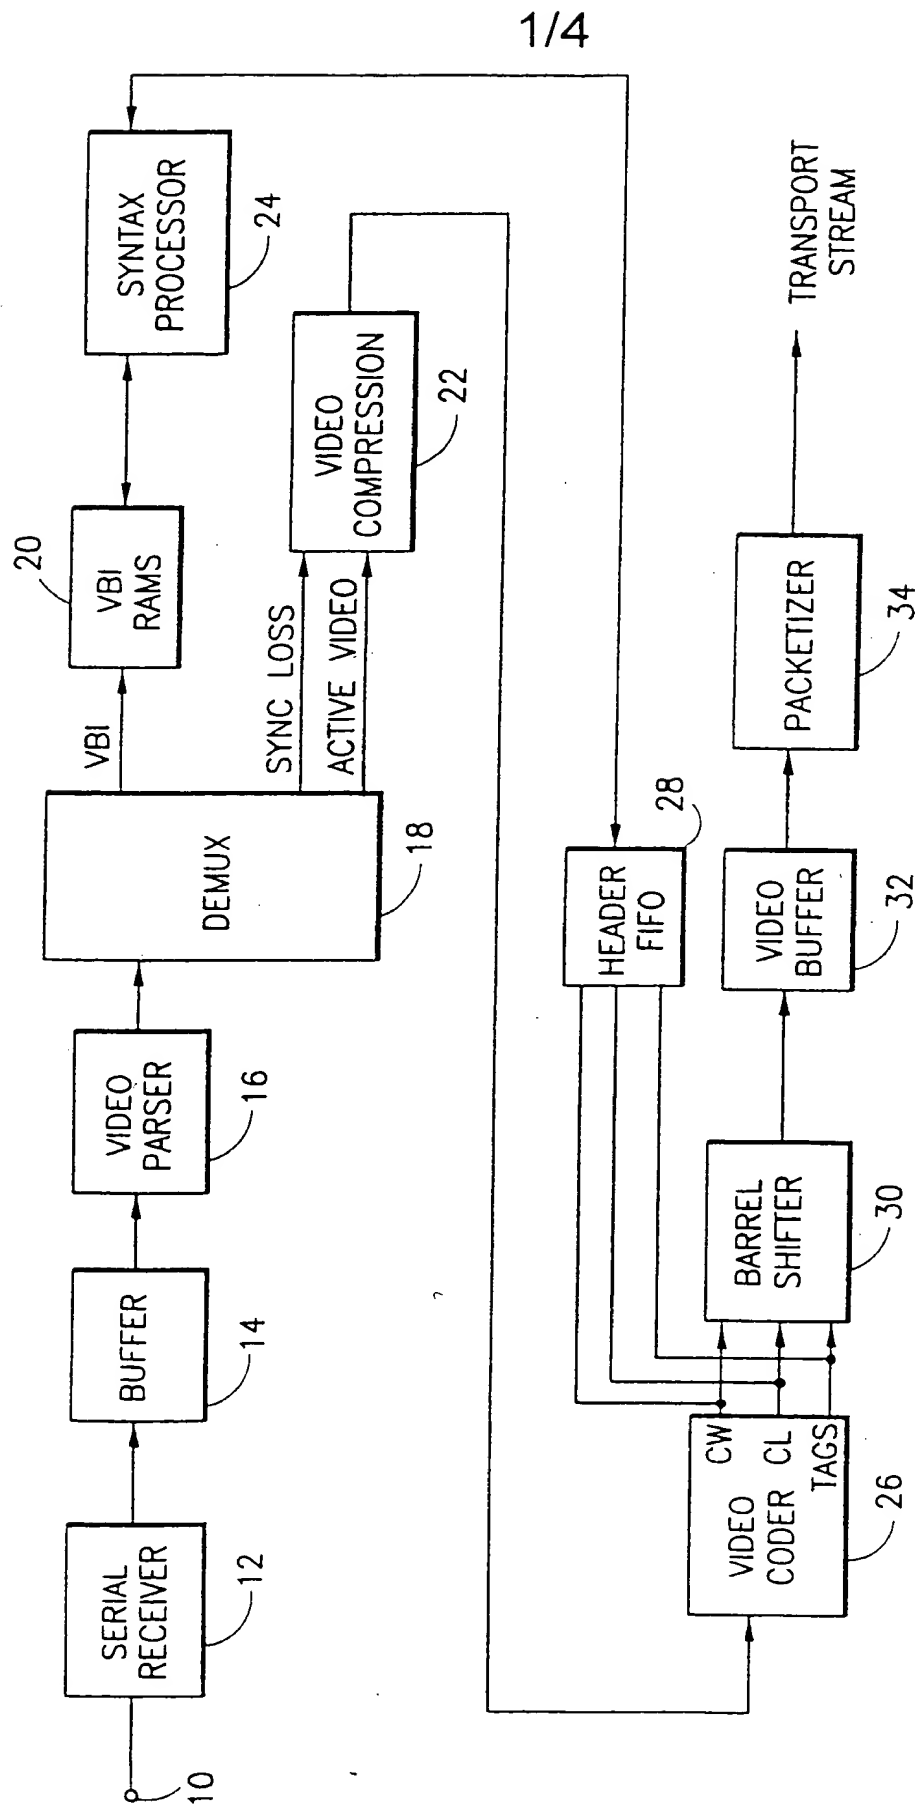


FIG. 1



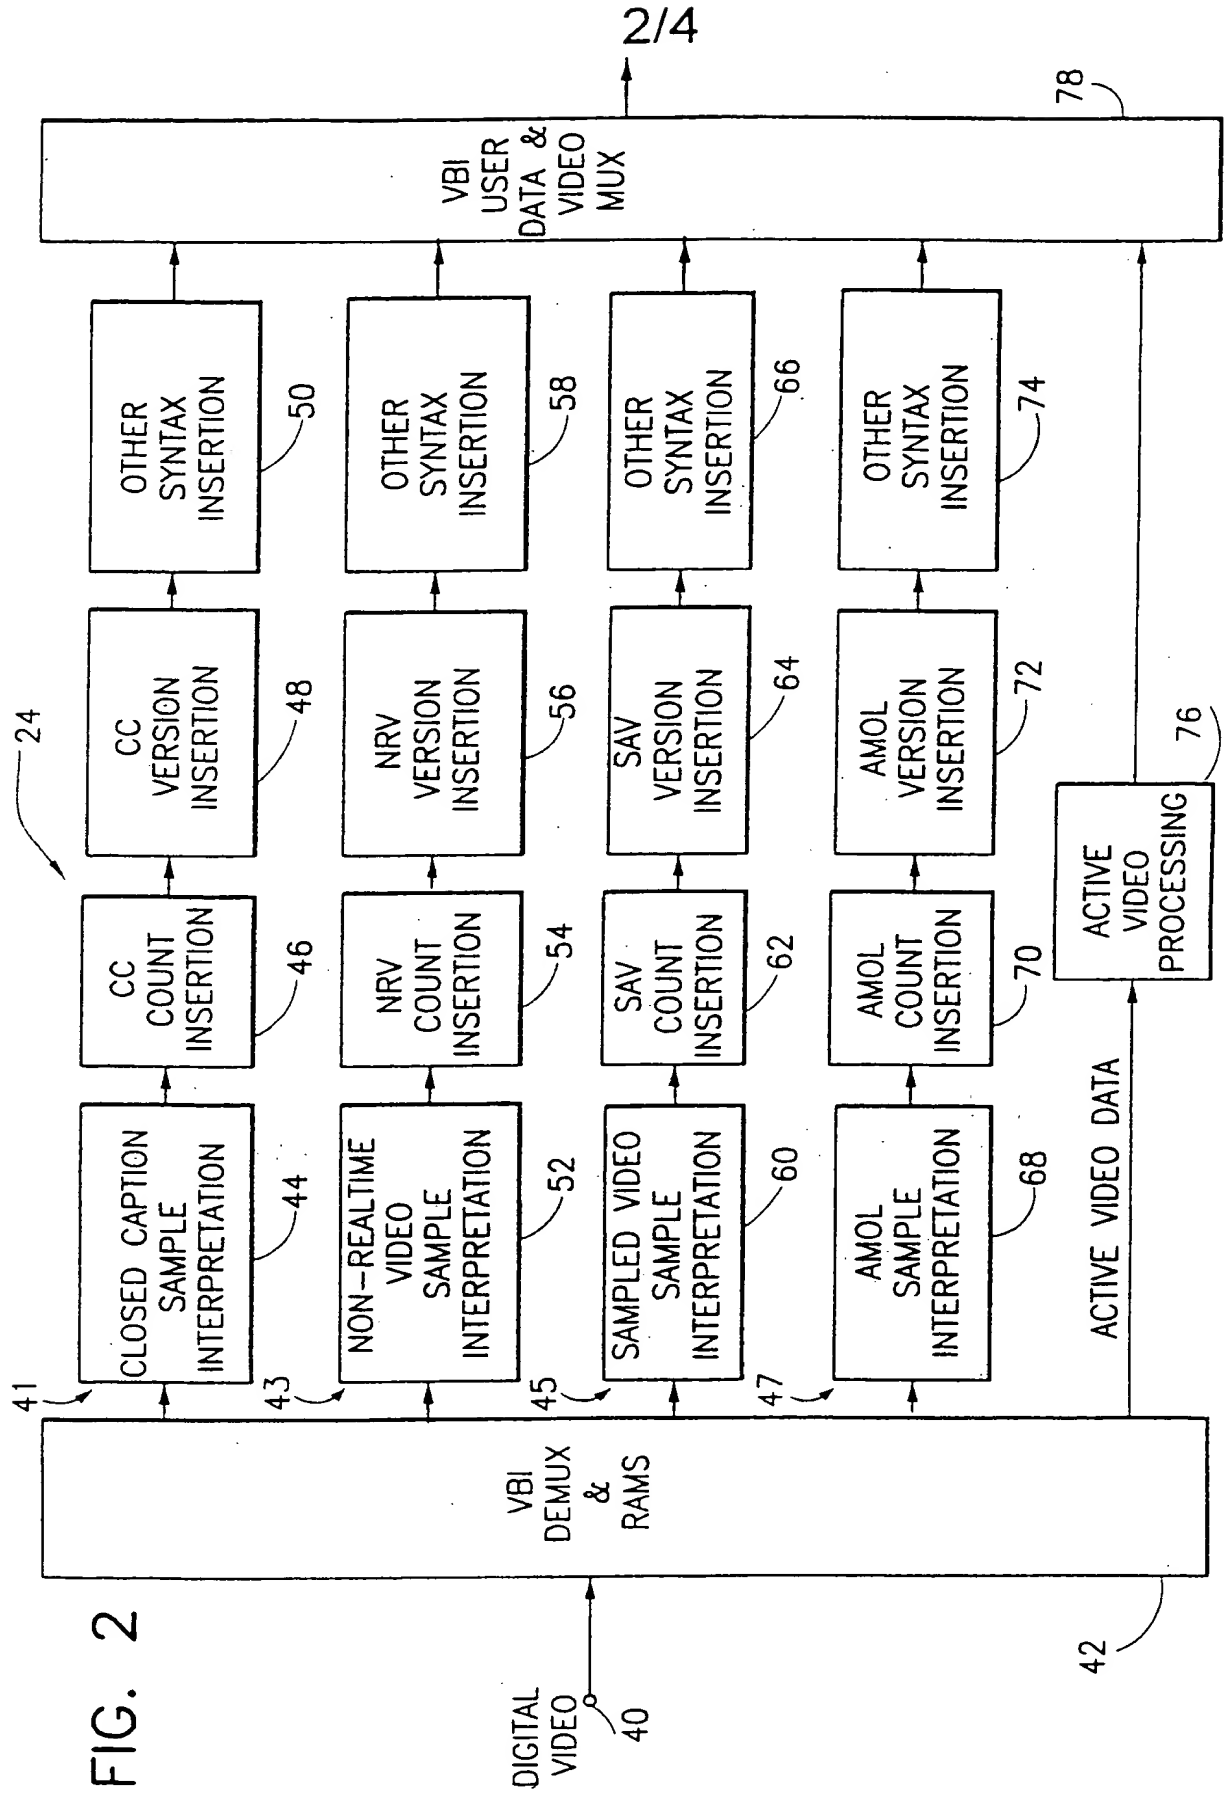


FIG. 3

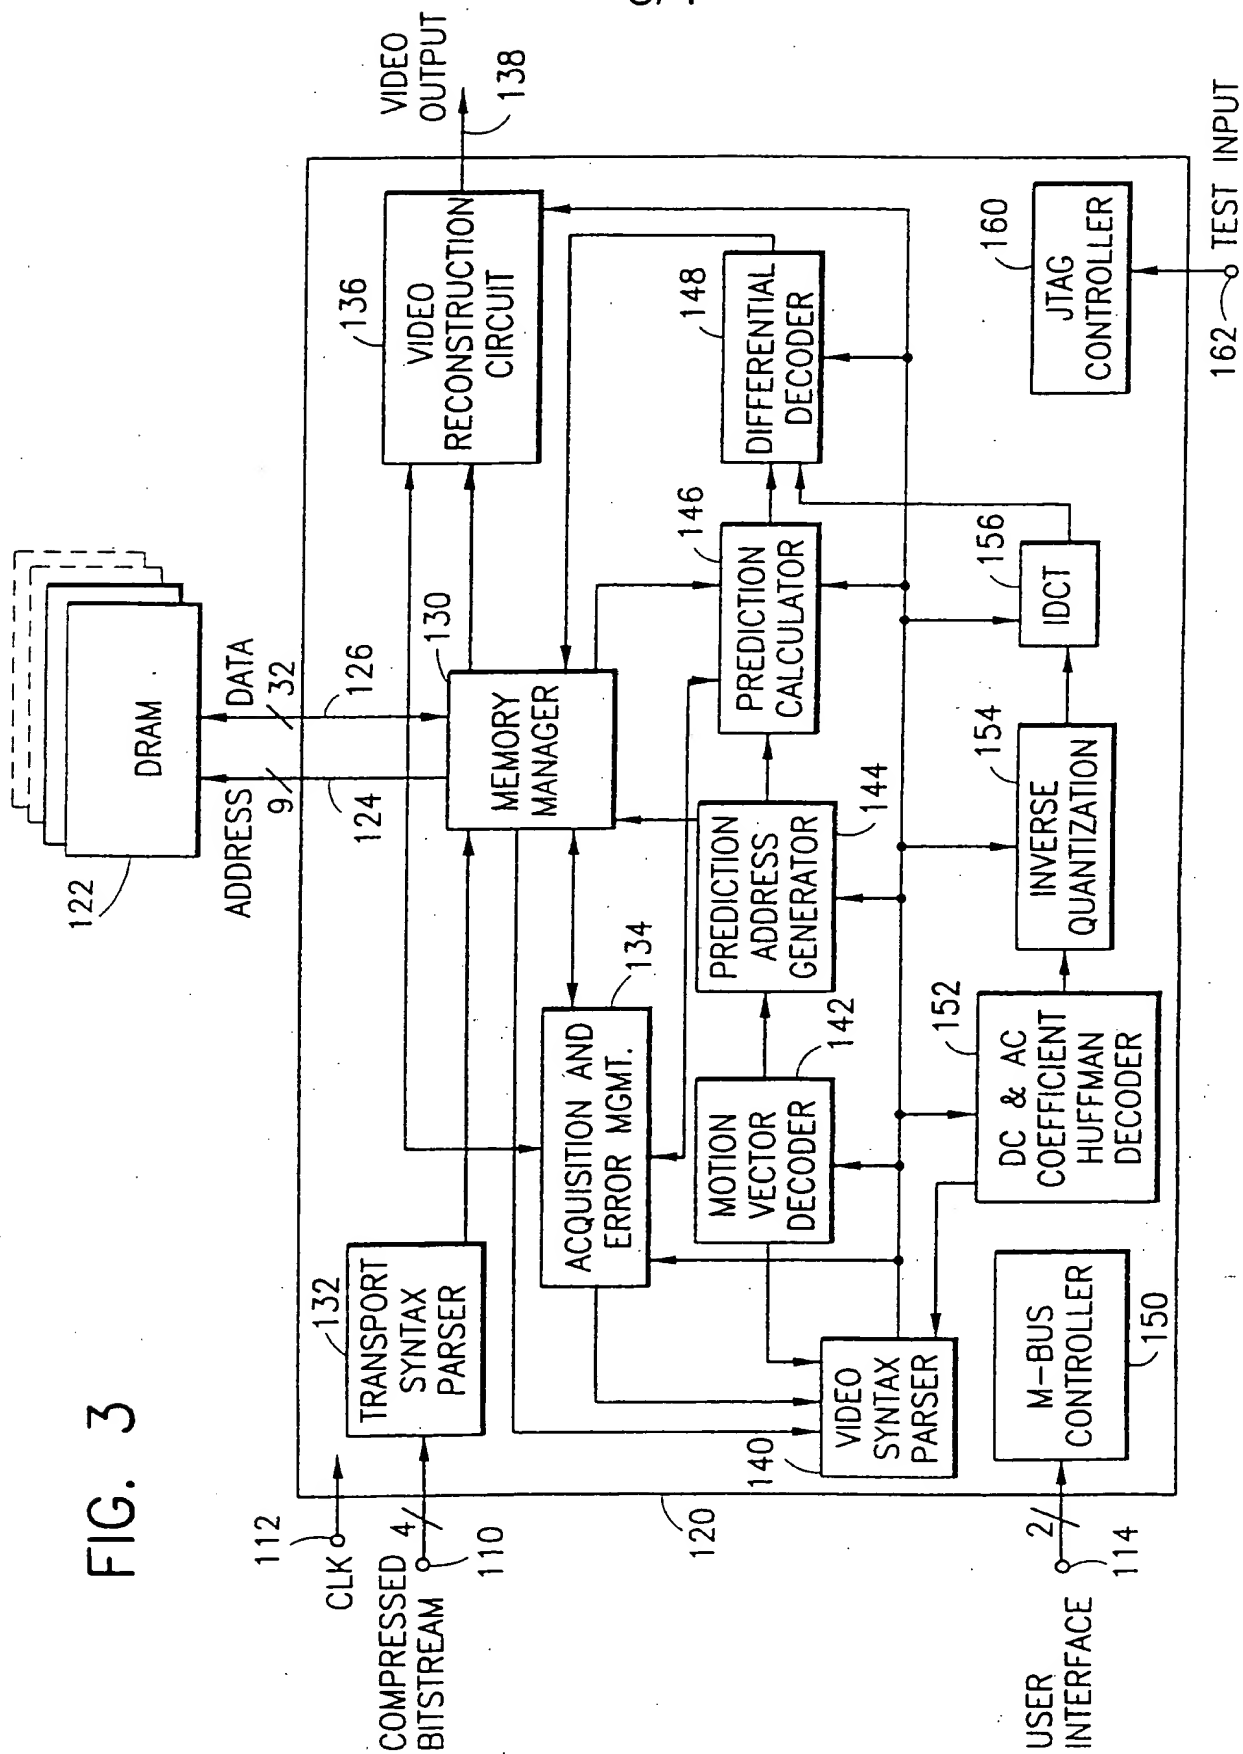

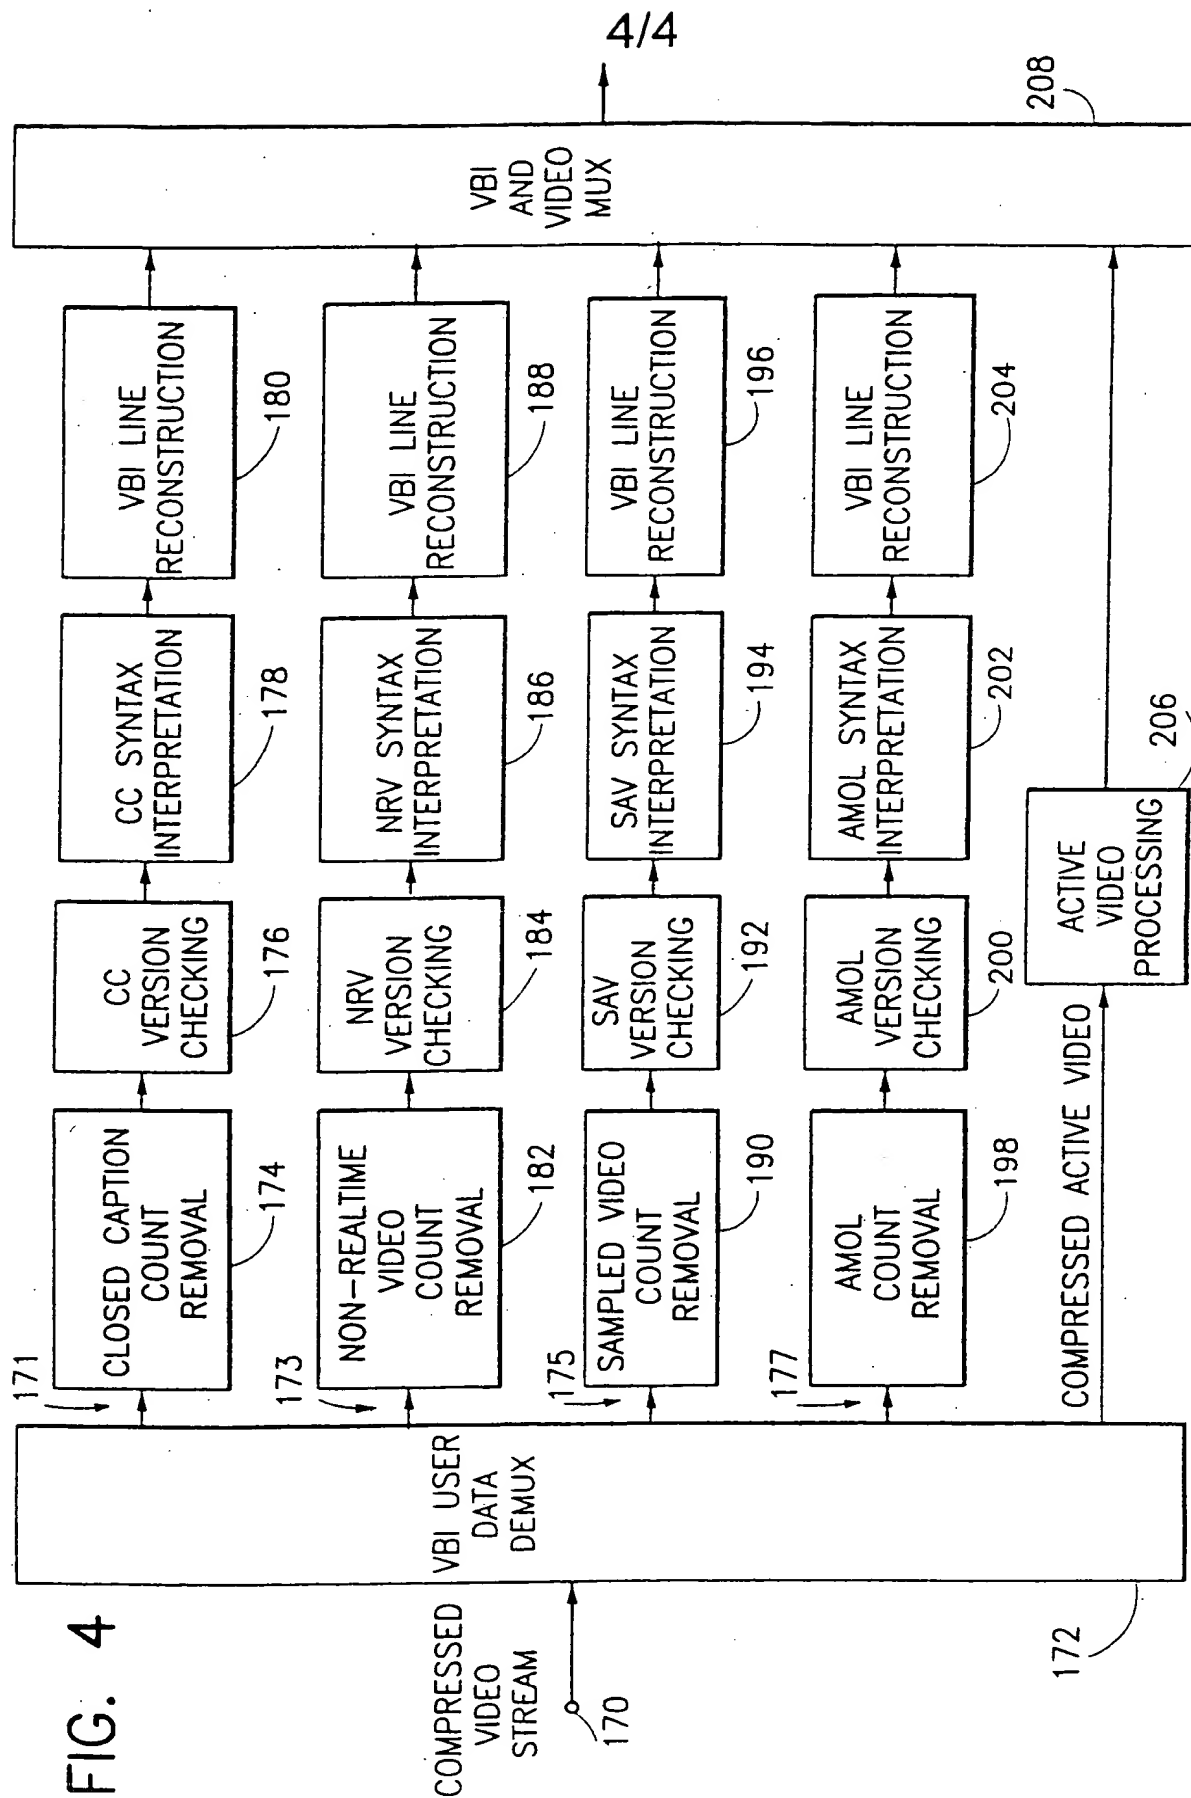

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/10840

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04N 7/087

US CL : 348/461, 478

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 348/426, 432, 435, 461, 463, 465, 467, 468, 473 478

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,E	US, A, 5,493,339 (BIRCH ET AL) 20 February 1996, col. 4, lines 30-61.	1-25
X	US, A, 4,862,268 (CAMPBELL ET AL) 29 August 1989, figs. 2, 4, 7 and 11.	1-25

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	* T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
* A document defining the general state of the art which is not considered to be part of particular relevance	* X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
* E earlier document published on or after the international filing date	* Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
* L document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* & document member of the same patent family
* O document referring to an oral disclosure, use, exhibition or other means	
* P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 31 AUGUST 1996	Date of mailing of the international search report 16 SEP 1996
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer VICTOR R. KOSTAK Telephone No. (703) 305-4374